



Double Open Rack

Standard:

Comply with ANS/EIA, RS-310D, IEC297-2, DIN41491, PART1, DIN41494, PART7, GB/T3047.2-92 ETSI standard.

Feature:

- 19" standard installation, adjustable rack height;
- Modular design, easily assemble and disassemble for delivery, low cost;
- Various optional accessories, easy to fix and maintain, stable and strong structure;
- Adjustable feet and heavy duty castors are available at the same time, convenient to move or fix.


Physical Characteristics

Bolein Double Open Rack	
Depth * Width	600mm * 600mm
Material	SPCC cold rolled steel; Thickness:1.5mm
Surface Finish	Degreasing, phosphoric, powder coated
Color	Black RAL9004 / Grey RAL7035
Main Parts	Pole, plinth, horizontal beam, castor, screw
Optional Accessories	Fixed shelf, PDU, cable management slot, keyboard panel, blank panel, etc.

Product Details



Structure

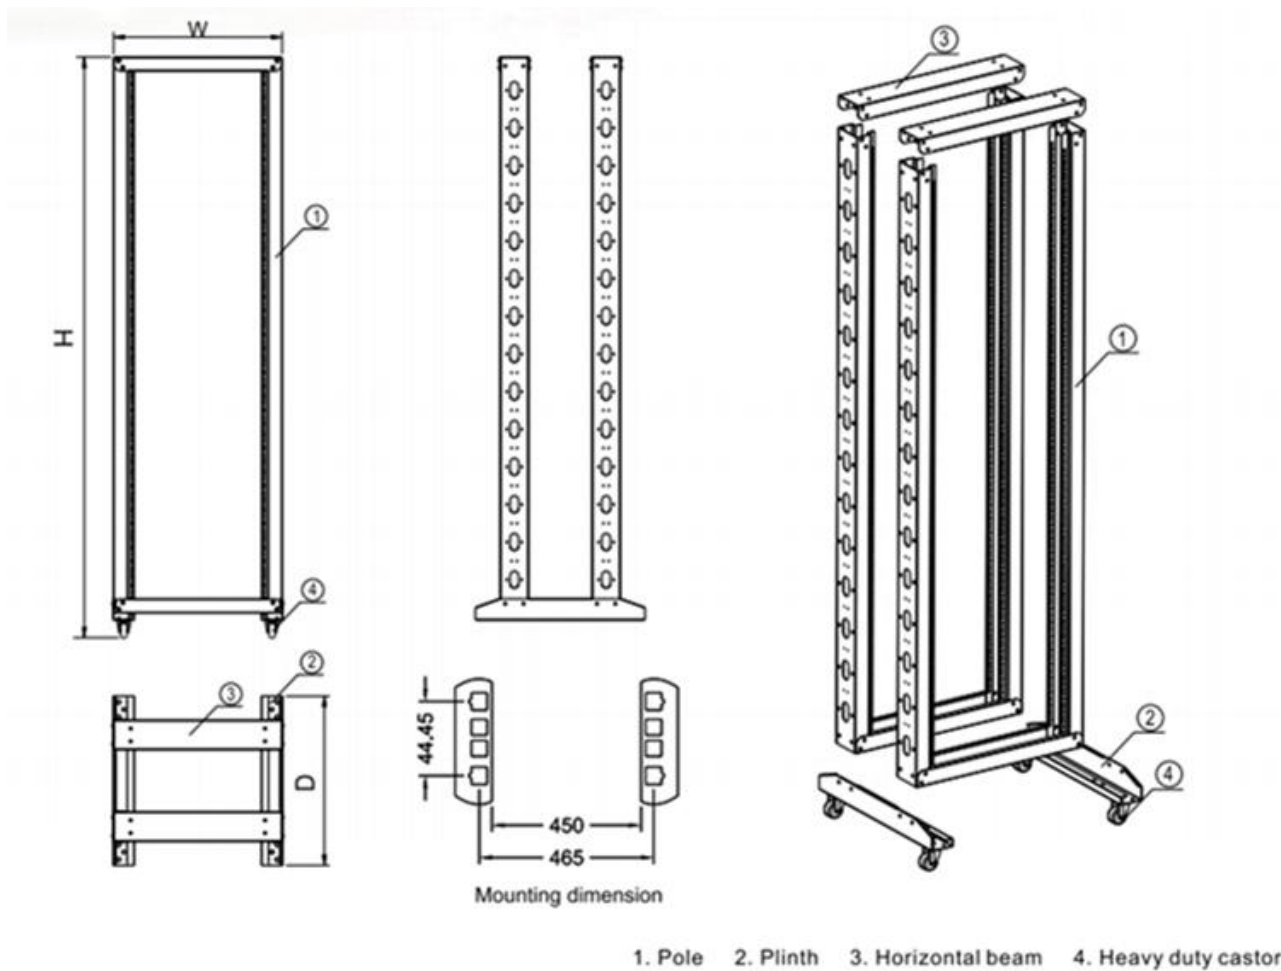

Main Parts

S/N	Specification	Quantity	Unit	Material	Surface finish	Remark
1	Pole	4	Piece	SPCC cold rolled steel 1.5	Powder coated	—
2	Plinth	2	Set	SPCC Cold rolled steel 1.5	Powder coated	—
3	Horizontal beam	4	Piece	SPCC Cold rolled steel 1.5	Powder coated	—
4	Heavy duty castor	4	Piece	—	—	Height: 72mm
5	Inner 6-angle screw&nuts	40	Set	—	—	—
6	Allen wrench	1	Piece	—	—	—

Dimension

Part NO.	Description	Capacity(U)	Width(mm)	Depth(mm)	Height(mm)
BLOR-D622	Open Rack, Double, 22U	22U	600	600	1177
BLOR-D627	Open Rack, Double, 27U	27U			1399
BLOR-D632	Open Rack, Double, 32U	32U			1622
BLOR-D637	Open Rack, Double, 37U	37U			1844
BLOR-D642	Open Rack, Double, 42U	42U			2066
BLOR-D647	Open Rack, Double, 47U	47U			2188